



OPERATION CHART: MODULE QW-1431/1433

GENERAL GUIDE

- Press Δ to change from mode to mode.
- Press Δ in any mode (except when any time setting operation is performed) to illuminate the display.
- In the digital display of your watch is continually changing, press any button to stop it.

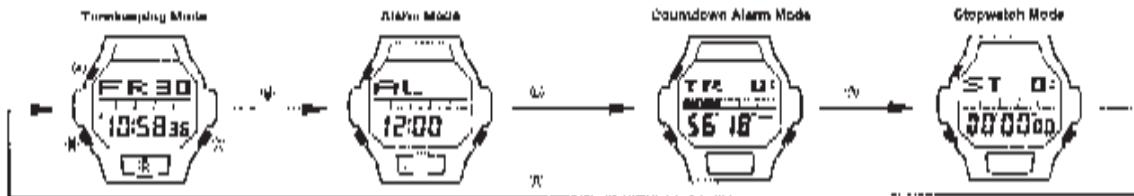

TIMEKEEPING MODE

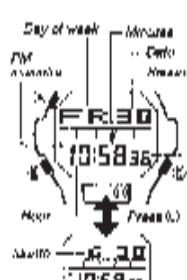

To set the time and date

- Press Δ while in the Timekeeping Mode. The seconds digits flash on the display because they are potential.
- Press Δ to change the selection in the following sequence:
Seconds → Hours → Minutes → 12-hour format → Month → Day → Year
- While the seconds digits are selected (flashing), press Δ to raise the seconds to "00". If you press Δ while the seconds count is in the range of 30 to 59, the seconds are reset to "00" and 1 is added to the minutes. If the seconds count is in the range of 20 to 29, no minute value is unchanged.
- With the minutes digit (second column) set to minutes (00 through 59), enter the number of hours you want.
- With the "12:00" hour setting selected, press Δ to return to the Timekeeping Mode.
- Both year and month/date, press Δ to return to the Timekeeping Mode.
- The date can be set within the range of January 1, 1980 to December 31, 2000.
- If you do not operate any button for a few minutes while a selection is flashing, the flashing stops and the watch goes back to the Timekeeping Mode automatically.

About the backlight

When a power failure (backlight function), the brightness of the watch is turned whenever a power failure occurs or battery time is up to avoid damage. Pressing Δ in any mode illuminates the display for about three minutes.


Light

The display turns off if you leave it for more than 10 minutes. Pressing Δ while in any mode illuminates the display for about three minutes.

- The back-light of this watch operates on a single battery (CR2032), which keeps the illuminating power after you have been used.
- Prevent use of the watch during shortening the battery.
- The watch will work until about seven minutes after the display is illuminated. This is caused by a transistor that changes when the Δ button is pressed. It does not damage any function of the watch.


To switch the backlight function on and off

In the Timekeeping Mode, hold down Δ for two or three seconds so when the backlight function on and off. When you switch the backlight function on, an indicator appears on the display as shown.



- The backlight function indicator can only get the display as all modes and you switch the backlight function on and off.
- The alarm function operates regardless of the backlight function only. It cannot affect operation of monthly time signal.

ALARM MODE

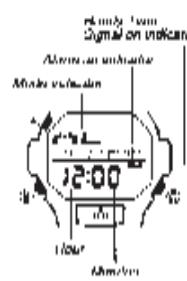

When the alarm is on, the alarm sounds for 20 seconds at the present time. When the hourly time signal is on, the watch beeps every hour on the hour.

To set the alarm time

- Press Δ while in the Alarm Mode until the time digits start to flash on the display. The time digits first become fully visible.
- At this point the alarm function starts automatically.
- Press Δ to change the selection in the following sequence:
Hours → Minutes

Press Δ to increase the selected value. Holding down Δ changes the number of high speed.

- The format (12-hour and 24-hour) of any alarm time matching the format you selected for normal timekeeping.
- When setting the alarm time using the 12-hour system, (pm) uses to indicate the hour is normally as morning or afternoon.
- After you set the alarm time, press Δ to return to the Alarm Mode.
- If you do not operate any button for a few minutes while a selection is flashing, the flashing stops and the watch goes back to the Alarm Mode automatically.

To stop the alarm

Pressing button to stop the alarm will start to alarm.

To activate an alarm and hourly time signal on and off


Press Δ while in the Alarm Mode to change the status of an alarm and hourly time signal in the following sequence.



To start the alarm

Hold down Δ while in the normal Alarm Mode to sound the alarm.

COUNTDOWN ALARM MODE

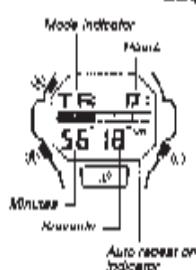

The countdown time can be between 1 second to 99 hours. When the countdown reaches zero, an alarm sounds for 10 seconds and when you press any button.


To set the countdown time

- Press Δ while in the Countdown Alarm Mode. The hours digit flashes on the display because it is selected.
- Press Δ to change the selection in the following sequence:
Hours → Minutes → Minutes
- Press Δ to increase the selected number. Holding down Δ changes the number of high speed.
- To set the starting value of the countdown time to 24 hours, set up to 00:00.
- While the auto repeat timing is selected, press Δ to switch auto repeat on or off.
- After you set the countdown time, press Δ to return to the Countdown Alarm Mode.
- If you do not operate any button for a few minutes while a selection is flashing, the flashing stops and the watch goes back to the Countdown Alarm Mode automatically.

To use the countdown timer

- Press Δ to switch the Countdown Alarm Mode to the one different table.
- Press Δ again to switch the one another times.
- You can switch the countdown time by pressing Δ .
- When the key is held and finger pressed, it will turn into the auto repeat function. To do this, repeat for 10 seconds or less, then release the finger by pressing any button. Countdown timing stops, press the key again and finger pressed again to the start value after 10 seconds.
- When the end of the countdown is reached, the alarm sounds. The alarm sounds, the starting repetition time is kept and continues until you release the key after reaching zero.

STOPWATCH MODE



The Stopwatch Mode has three functions stopped time, split time, and total time. The range of the stopwatch is 23 hours, 59 minutes, 59.99 seconds.

To measure a split time

- Press Δ to start the stopwatch.
- Press Δ to stop the stopwatch.
- You can measure a measurement operation by pressing Δ again.
- Press Δ to clear the stopwatch to all zeros.


To record split times

1. Press (C) to start the stopwatch.
2. Press (A) to display the timing up to that point. Stopwatch timing continues internally.
3. Press (A) to clear the split time and to continue time measurement on the display.
- You can repeat steps 2 and 3 as many times as you want.
4. Press (C) to stop the time measurement.
5. Press (A) to clear the stopwatch to all zeros.

To time first and second place finishes

1. Press (C) to start the stopwatch.
2. Press (A) when the first finisher crosses the line, and record the time.
3. Press (C) when the second finisher crosses the line.
4. Press (A) to display the finishing time of the second finisher.
5. Press (A) again to clear the stopwatch to all zeros.

AUTO DISPLAY FUNCTION



The upper part of the display continually repeats a short demonstration if you hold down (B) for a few seconds in any mode. The demonstration is also performed when you illuminate the display by pressing (D). Press any button to stop the demonstration.

Notes

- The Auto Display function cannot be performed while you are making settings (i.e. while digits or other settings are flashing on the display).
- Frequent use of the Auto Display function shortens the battery life.